

Data Sheet


Premium Vinyl Siding
Lexington[®] Series

Product Test Data

HOMEX[®] Vinyl Siding meets or exceeds all industry standards per ASTM D3679.

Thickness (Board & Batten)	048" ± .001"
Thickness (Beaded)	044" ± .001"
Specific Gravity	1.45
Tensile Strength (PSI)	7,154
Tensile Modulus (PSI)	416,900
IZOD Impact Strength @ 32°F	Passes per ASTM D3679
Heat Deflection Temp. @ 264 PSI	169°F
Coefficient of Linear Expansion	3.30 x 10 ⁻⁵
Warpage	0.00"
Heat Shrinkage	2.4%
Impact Resistance	Passes per ASTM D3679
Surface Distortion @ 140°F	0
Flame Spread Index	10
Fire Rating	Class A
Smoke Developed	395
Fuel Contribution	0
Average Time Of Burning	Self extinguished
Average Extent Of Burning	2.379mm
Weathering	Passes per ASTM D3679
Wind Load Rating~	162 + MPH

~(Wind Velocity based on IBC)

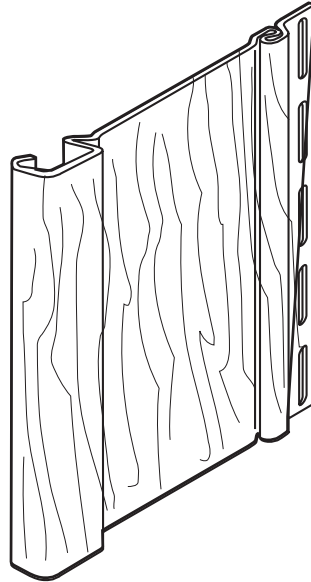


21BB70 ___

7" Board & Batten Siding Panel

Deep Cedar
Woodgrain Finish
048" ± .001" Thickness
Length 10' - 0"
17 Panels/ Carton
1 Sq./Carton
Carton Weight: 50.03 lbs.

Color Choices

White Birch (02)
Classic Sand (11)
Warm Sandalwood (17)
Sunny Maize (22)
Summer Wheat (26)
*Soft Willow (41)
*Pebble Clay (43)
Harbor Stone (44)
*Graphite Grey (49)
*Artisan Clay (61)
^Seagrass (79)
^Twilight (80)
*Meadow (82)
^Keystone (85)
^Nutmeg (86)

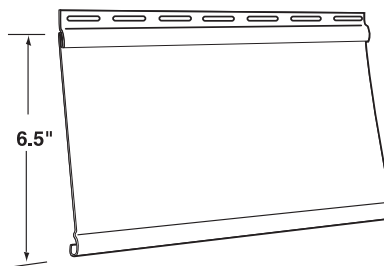

21SS65BD ___

6.5" Beaded Siding Panel

Smooth Matte Emboss
044" ± .001" Thickness
Length 12' - 4"
30 Panels/ Carton
2 Sq./Carton
Carton Weight: 97.47 lbs.

Color Choices

White Birch (02)
Classic Sand (11)
Warm Sandalwood (17)
Sunny Maize (22)
Summer Wheat (26)
*Soft Willow (41)
*Pebble Clay (43)
Harbor Stone (44)
*Artisan Clay (61)
^Seagrass (79)
^Twilight (80)
^Keystone (85)
^Nutmeg (86)



Home Innovation
NGBS GREEN CERTIFIED™



Consult the VSI[®] website at
www.vinylsiding.org
for a current list of certified
products and colors.

* Premium colors are made with Armor Coat™ UVA ^Elite Colors made with Armor Coat™ Plus