


Data Sheet

Select Series™ Vinyl Siding

Unique Profiles

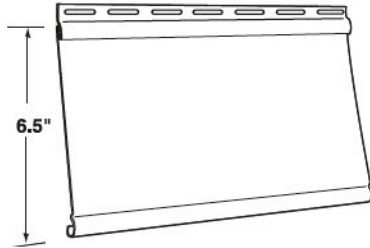


Beaded Siding Panel 6.5" 21SS65BD__

Length 12' - 4" | 30 Panels/Ctn. | 2 Sq./Ctn. | Ctn. Weight: 97.47 lbs.

Color # | Color | Smooth Matte Finish _____

02 White Birch	41 Soft Willow	80 Twilight
11 Classic Sand	43 Pebble Clay	85 Keystone
17 Warm Sandalwood	44 Harbor Stone	86 Nutmeg
22 Sunny Maize	61 Artisan Clay	
26 Summer Wheat	79 Seagrass	

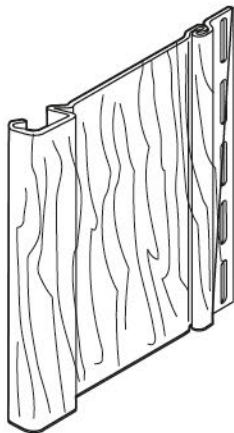

Board & Batten 7" Panel 21BB70__ | FULL Cartons Only

Length 10' - 0" | 17 Panels/Ctn. | 1 Sq./Ctn. | Ctn. Weight: 50.05 lbs.

Color # | Color | Deep Cedar Woodgrain Finish _____

02 White Birch	44 Harbor Stone	85 Keystone
11 Classic Sand	49 Graphite Grey	87 Heritage Red
17 Warm Sandalwood	61 Artisan Clay	89 Hampton Blue
22 Sunny Maize	79 Seagrass	90 Gray Flannel
26 Summer Wheat	80 Twilight	94 Mountain Pine
41 Soft Willow	81 Canyon Brown	
43 Pebble Clay	82 Meadow	

Select Series™ Vinyl Siding - Unique Profiles

SCI® Vinyl Siding meets or exceeds all industry standards per ASTM D3679.

Product Test Data

6.5 Beaded Thickness.....	.044" ± .001"	Surface Distortion @ 140°F.....	0
Board & Batten Thickness.....	.048" ± .001"	Flame Spread Index.....	10
Specific Gravity.....	1.45	Fire Rating	Class A
Tensile Strength (PSI).....	7,154	Smoke Developed.....	395
Tensile Modulus (PSI).....	416,900	Fuel Contribution.....	0
IZOD Impact Strength @ 32°F.....	Passes per ASTM D3679	Average Time Of Burning.....	Self extinguished
Heat Deflection Temp. @ 264 PSI.....	169°F	Average Extent Of Burning.....	2.379 mm
Coefficient of Linear Expansion.....	3.30 x 10 ⁻⁵	Weathering.....	Passes per ASTM D3679
Warpage.....	0.00"	Impact Resistance.....	Passes per ASTM D3679
Heat Shrinkage.....	0.3%		



Go to
www.vinylsiding.org
 for a current list
 of certified products
 and colors.

