



MASON'S ROCK

INSTALLATION GUIDE



800.945.4440
WWW.STYLECRESTINC.COM




INSTALLATION GUIDE




INSTALLATION SUMMARY

Your new Mason's Rock skirting comes in 5 foot long panels that are either 32 inches, 36 inches, or 48 inches tall depending on your home and the option you selected. Your skirting can be installed using one of three basic installation options based on your preferences, local building codes, and home's exposure to frost:




OPTION A

OPTION A
The top of the panel attaches directly to the building and the bottom of the panel uses the Style Crest bottom channel system



OPTION B

OPTION B
The top of the panel attaches directly to the building and the bottom of the panel is buried in a ground trench



OPTION C

OPTION C
The panel is supported using the Style Crest vinyl trim channel system
Use in areas affected by frost

TOOLS YOU WILL NEED

ALL OPTIONS:

- Hammer
- Powered Screwdriver
- Snips
- Plumb Line or Level
- Tape Measure
- Power Saw with Fine Tooth Blade
- Chalk Line
- Utility Knife
- Straight Edge or Carpenter's Square
- Heavy Duty Heat Gun

OPTION B ONLY:

- Shovel for Digging
- Garden Hoe or Rake for Backfilling

FASTENERS YOU WILL NEED

FASTENER	PART NO.	USE	OPTION		
			A	B	C
Ground Spikes	-----	Staking Bottom Channel	X		X
Nails or Screws	-----	Attaching Top Trim Back Channel to Home			X
1 In. Lg. Hex Head Screws-Black	2995	Joining Panels / Attaching to Home	X	X	X
OR					
1 In. Lg. Hex Head Screw-Sandstone	29255	Joining Panels / Attaching to Home	X	X	X

IMPORTANT NOTICE

1. Use either a power saw with a fine tooth blade mounted with reverse rotation, aviation snips, or a utility knife to cut Mason's Rock components.
2. Always consult and follow your local building codes when installing any product to your home.

PERFORMING THE INSTALLATION

OPTION A

STEP 1

INSTALL THE BOTTOM CHANNEL

Use a level or plumb line to establish the location of the bottom channel. Locate the tall/backside of the bottom channel directly beneath the outside edge of the home where the top trim back component will be attached (**Figure 1**). To prevent grass from growing around the skirting, install Style Crest Skirting Saver (part # 345044) around the base.

Attach the bottom channel directly to the ground through the pre-punched holes (**Figure 2**). Place the ground spikes every 24 inches. Extra holes are provided for convenience. A punch may be used to set the last few inches of the spike. Leave a 1/2 inch gap between each section of bottom channel in order to allow for expansion.

Note: If installation occurs in areas prone to high wind or where ground is spongy or where ground has not fully settled, it is recommended that the bottom channel be fastened to treated wooden stakes. If installation occurs on concrete, use 3/4 inch long masonry nail or equivalent or a suitable adhesive in place of the normal ground spike.




FIGURE 1




FIGURE 2

STEP 2

INSTALL AND ATTACH THE MASON'S ROCK PANEL TO YOUR HOME

Attach the Mason's Rock panel directly to your home using either the top flange or mortar joint fastening method.

THE TOP FLANGE METHOD

Simply drive the screws through the flange and into the mating surface on your home. The mating surface should be a trim board or frame piece, but never the vinyl siding itself. The vinyl siding will not provide a significant mounting surface and expands at a different rate than your Mason's Rock panels. It is important to note that the flange can either be tucked behind (**Figure 3**) or applied outside of the trim on your home (**Figure 4**).




FIGURE 3




FIGURE 4

THE MORTAR JOINT METHOD

Remove the top flange (**Figure 5**) and use the mortar joints as a fastening surface. The panel and trim surfaces should overlap by at least 2 inches. Screws should be driven through both panels at the overlapping mortar joints.




FIGURE 5

STEP 3

REFER TO THE LAST PAGE OF THIS GUIDE FOR JOINING PANELS AND CREATING CORNERS

PERFORMING THE INSTALLATION

OPTION B

STEP 1

DIG THE GROUND TRENCH

Use a level or plumb line to establish the location of the bottom ground trench. The trench should be located so that the bottom of the Mason's Rock panel will be in alignment with the top of the panel when it is attached to the home. Dig the trench 3-4 inches deep.

STEP 2

INSTALL AND ATTACH THE MASON'S ROCK PANEL TO YOUR HOME

Place the Mason's Rock Panel in the ground trench and trim the bottom (hidden area) to accommodate uneven surfaces. The top of the panel should remain level and true. (**Figure 6**). Attach the Mason's Rock panel directly to your home using either the top flange or mortar joint fastening method.

THE TOP FLANGE METHOD

Simply drive the screws through the flange and into the mating surface on your home. The mating surface should be a trim board or frame piece, but never the vinyl siding itself. The vinyl siding will not provide a significant mounting surface and expands at a different rate than your Mason's Rock panels. It is important to note that the flange can either be tucked behind (**Figure 7**) or applied outside of the trim on your home (**Figure 8**).

THE MORTAR JOINT METHOD

Remove the top flange (**Figure 9**) and use the mortar joints as a fastening surface. The panel and trim surfaces should overlap by at least 2 inches. Screws should be driven through both panels at the overlapping mortar joints.

STEP 3

REFER TO THE LAST PAGE OF THIS GUIDE FOR JOINING PANELS AND CREATING CORNERS

STEP 4

BACKFILL THE GROUND TRENCH




FIGURE 6




FIGURE 7




FIGURE 8




FIGURE 9

PERFORMING THE INSTALLATION

OPTION C

STEP 1

INSTALL THE BOTTOM CHANNEL

Use a level or plumb line to establish the location of the bottom channel. Locate the tall/backside of the bottom channel directly beneath the outside edge of the home where the top trim back component will be attached (**Figure 10**). To prevent grass from growing around the skirting, install Style Crest Skirting Saver (part # 345044) around the base.

Attach the bottom channel directly to the ground through the pre-punched holes (**Figure 11**). Place the ground spikes every 24 inches. Extra holes are provided for convenience. A punch may be used to set the last few inches of the spike. Leave a 1/2 inch gap between each section of bottom trim in order to allow for expansion.

Note: If installation occurs in areas prone to high wind or where ground is spongy or where ground has not fully settled, it is recommended that the bottom channel be fastened to treated wooden stakes. If installation occurs on concrete, use 3/4 inch long masonry nail or equivalent or a suitable adhesive in place of the normal ground spike.




FIGURE 10




FIGURE 11

STEP 2

INSTALL THE TOP TRIM BACK

Locate where the top trim back will mount to your home. The bottom edge of the top trim back can extend below the bottom edge of your home if there is a solid support for nailing and a solid bearing for the top trim front piece against the side of the home. Mark a guide line around the home using a chalk line or other method to aid in installing the top trim back. Attach the top trim back to your home by driving screws in the middle of every slot (**Figure 12**). Leave a 1/16 inch gap between the screw head and the top trim back to allow the piece to expand and contract under normal conditions. The screws should drive 3/4 inch deep into the mounting surface. See the corners section below for instructions on how to install the piece around corners.




FIGURE 12




FIGURE 13

STEP 3

INSTALL THE MASON'S ROCK PANEL AND TOP TRIM FRONT

Place the bottom of the Mason's Rock Panel into the bottom channel and lean the top of the panel against the top trim back. Install the top trim front (**Figure 13**) by snapping the top edge into the top trim back lock. The piece should "snap" into place and lock. The top trim front is notched on one end to permit overlap with the adjoining piece (**Figure 14**).




FIGURE 14

STEP 4

REFER TO THE LAST PAGE OF THIS GUIDE FOR JOINING PANELS AND CREATING CORNERS

PERFORMING THE INSTALLATION

JOINING PANELS, CREATING CORNERS, FRAMING AND VENTILATION

JOINING PANELS

Your Mason's Rock skirting panels come with a pre-trimmed/flangeless edge (**Figure 15**), allowing the panels to be joined together in two simple steps:

STEP 1

Join two panels by placing the trimmed/flangeless on top of the flanged end of the adjoining panel (**Figure 16**).

STEP 2

Attach the two panels together by driving installation screws through both panels at the mortar joint line (**Figure 16**).




FIGURE 15




FIGURE 16

CREATING CORNERS

Your Mason's Rock skirting panels have two corner options:

MASON'S ROCK

Create corners with your Mason's Rock panels by simply using a heavy duty heat gun and bending around the corner to form into place (**Figure 17**).

TRIM CHANNEL SYSTEM

The bottom channel can be notched to form clean looking, attractive corners (**Figure 18**). The top trim back and the top trim front piece can be simply formed by bending over a rigid edge such as a cutting table or similar surface (**Figure 19**).




FIGURE 17




FIGURE 18

FRAMING

A framing support system (**Figure 20**) made of treated lumber or other materials should be considered when using skirting taller than 36 inches or where local code requires.




FIGURE 19




FIGURE 20

VENTILATION

Mason's Rock skirting provides a nearly air tight enclosure when installed by itself. The addition of the Style Crest Mason's Rock venting inserts (**Figure 21**) can add required ventilation to your homes skirting. Each Mason's Rock ventilation insert provides 68 square inches of ventilation. Please consult your local code to determine the correct amount of skirting ventilation for your home.

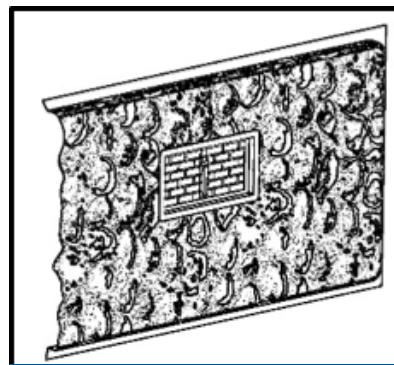


FIGURE 21

800.945.4440
WWW.STYLECRESTINC.COM
