

Data Sheet

Premium Vinyl Siding
Lexington[®] Series

Product Test Data

HOMEX[®] Vinyl Siding meets or exceeds all industry standards per ASTM D3679.


Thickness (Board & Batten)	048" ± .001"
Thickness (Beaded)	044" ± .001"
Specific Gravity	1.45
Tensile Strength (PSI)	7,154
Tensile Modulus (PSI)	416,900
IZOD Impact Strength @ 32°F	Passes per ASTM D3679
Heat Deflection Temp. @ 264 PSI	169°F
Coefficient of Linear Expansion	3.30 x 10 ⁻⁵
Warpage	0.00"
Heat Shrinkage	2.4%
Impact Resistance	Passes per ASTM D3679
Surface Distortion @ 140°F	0
Flame Spread Index	10
Fire Rating	Class A
Smoke Developed	395
Fuel Contribution	0
Average Time Of Burning	Self extinguished
Average Extent Of Burning	2.379mm
Weathering	Passes per ASTM D3679
Wind Load Rating~	162 + MPH

~(Wind Velocity based on IBC)

Deep Cedar Woodgrain Finish

7" Board & Batten Siding Panel 21BB70

Length 10' - 0" | 17 Panels/Carton | 1 Sq./Carton
Carton Weight: 50.03 lbs. | 048" ± .001" Thickness

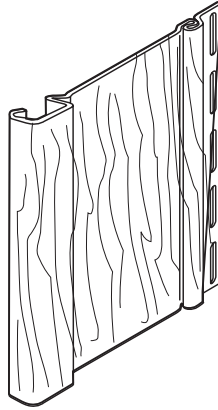


Color Choices

02 White Birch	44 Harbor Stone	85 Keystone
11 Classic Sand	49 Graphite Grey	86 Nutmeg
17 Warm Sandalwood	61 Artisan Clay	87 Heritage Red
22 Sunny Maize	79 Seagrass	89 Hampton Blue
26 Summer Wheat	80 Twilight	90 Gray Flannel
41 Soft Willow	81 Canyon Brown	94 Mountain Pine
43 Pebble Clay	82 Meadow	

Smooth Matte Emboss Finish

6.5" Beaded Siding Panel 21SS65BD

Length 12' - 4" | 30 Panels/Carton | 2 Sq./Carton
Carton Weight: 97.47 lbs. | 044" ± .001" Thickness



Color Choices

02 White Birch	41 Soft Willow	80 Twilight
11 Classic Sand	43 Pebble Clay	85 Keystone
17 Warm Sandalwood	44 Harbor Stone	86 Nutmeg
22 Sunny Maize	61 Artisan Clay	
26 Summer Wheat	79 Seagrass	



Home Innovation
NGBS GREEN CERTIFIED™



Consult the VSI[®] website at
www.vinylsiding.org
for a current list of certified
products and colors.