

Data Sheet

Select Series™ Vinyl Siding


Signature Style



Item / Image

Description / Info

Colors / Color

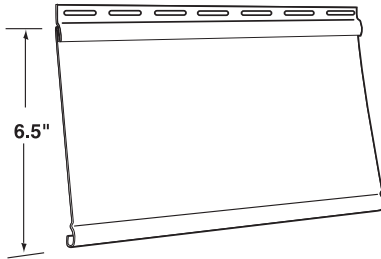


21SS65BD_ _

Beaded Siding Panel 6.5"

Smooth Matte Finish
Length 12' - 4"
30 Panels/ Carton
2 Sq./Carton
Carton Weight: 97.47 lbs.

- | | |
|----------------------|----------------|
| White Birch (02) | ^Seagrass (79) |
| Classic Sand (11) | ^Twilight (80) |
| Warm Sandalwood (17) | ^Keystone (85) |
| Sunny Maize (22) | ^Nutmeg (86) |
| Summer Wheat (26) | |
| *Soft Willow (41) | |
| *Pebble Clay (43) | |
| Harbor Stone (44) | |
| *Artisan Clay (61) | |

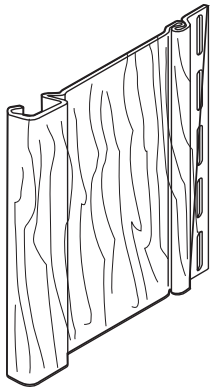

21BB70_ _

Board & Batten 7" Panel

Deep Cedar Woodgrain Finish
Length 10' - 0"
17 Panels/ Carton
1 Sq./Carton
Carton Weight: 50.05 lbs.

- | | |
|----------------------|----------------|
| White Birch (02) | ^Seagrass (79) |
| Classic Sand (11) | ^Twilight (80) |
| Warm Sandalwood (17) | *Meadow (82) |
| Sunny Maize (22) | ^Keystone (85) |
| Summer Wheat (26) | ^Nutmeg (86) |
| *Soft Willow (41) | |
| *Pebble Clay (43) | |
| Harbor Stone (44) | |
| *Graphite Grey (49) | |
| *Artisan Clay (61) | |

Select Series™ Vinyl Siding - Unique Profiles

RMC® Vinyl Siding meets or exceeds all industry standards per ASTM D3679.

*Premium Colors made with Armor Coat™ UVA
^ Elite Colors made with Armor Coat™ Plus

Product Test Data

6.5 Beaded Thickness.....044" ± .001"
Board & Batten Thickness.....048" ± .001"
Specific Gravity.....1.45
Tensile Strength (PSI).....7,154
Tensile Modulus (PSI).....416,900
IZOD Impact Strength @ 32°F.....Passes per ASTM D3679
Heat Deflection Temp. @ 264 PSI.....169°F
Coefficient of Linear Expansion.....3.30 x 10⁻⁵
Warpage.....0.00"
Heat Shrinkage.....0.3%
Surface Distortion @ 140°F.....0

Flame Spread Index.....10
Fire Rating Class A
Smoke Developed.....395
Fuel Contribution.....0
Average Time Of Burning.....Self extinguished
Average Extent Of Burning.....2.379 mm
Weathering.....Passes per ASTM D3679
Windload Rating*162 MPH
*(Wind Velocity based on IBC)
Impact Resistance..... Passes per ASTM D3679



Style Crest®, Inc.
2450 Enterprise St.
Fremont, Ohio 43420

www.stylecrestinc.com

Made in the U.S.A. by America's dedicated workforce.
Printed in the U.S.A
Specifications are subject to change without notice

© Copyright 2016 Rev. 04/15/16 Select Series Data RMC-0005



Home Innovation
NGBS GREEN CERTIFIED™



Consult the VSP® website at
www.vinylsiding.org
for a current list of certified
products and colors.